



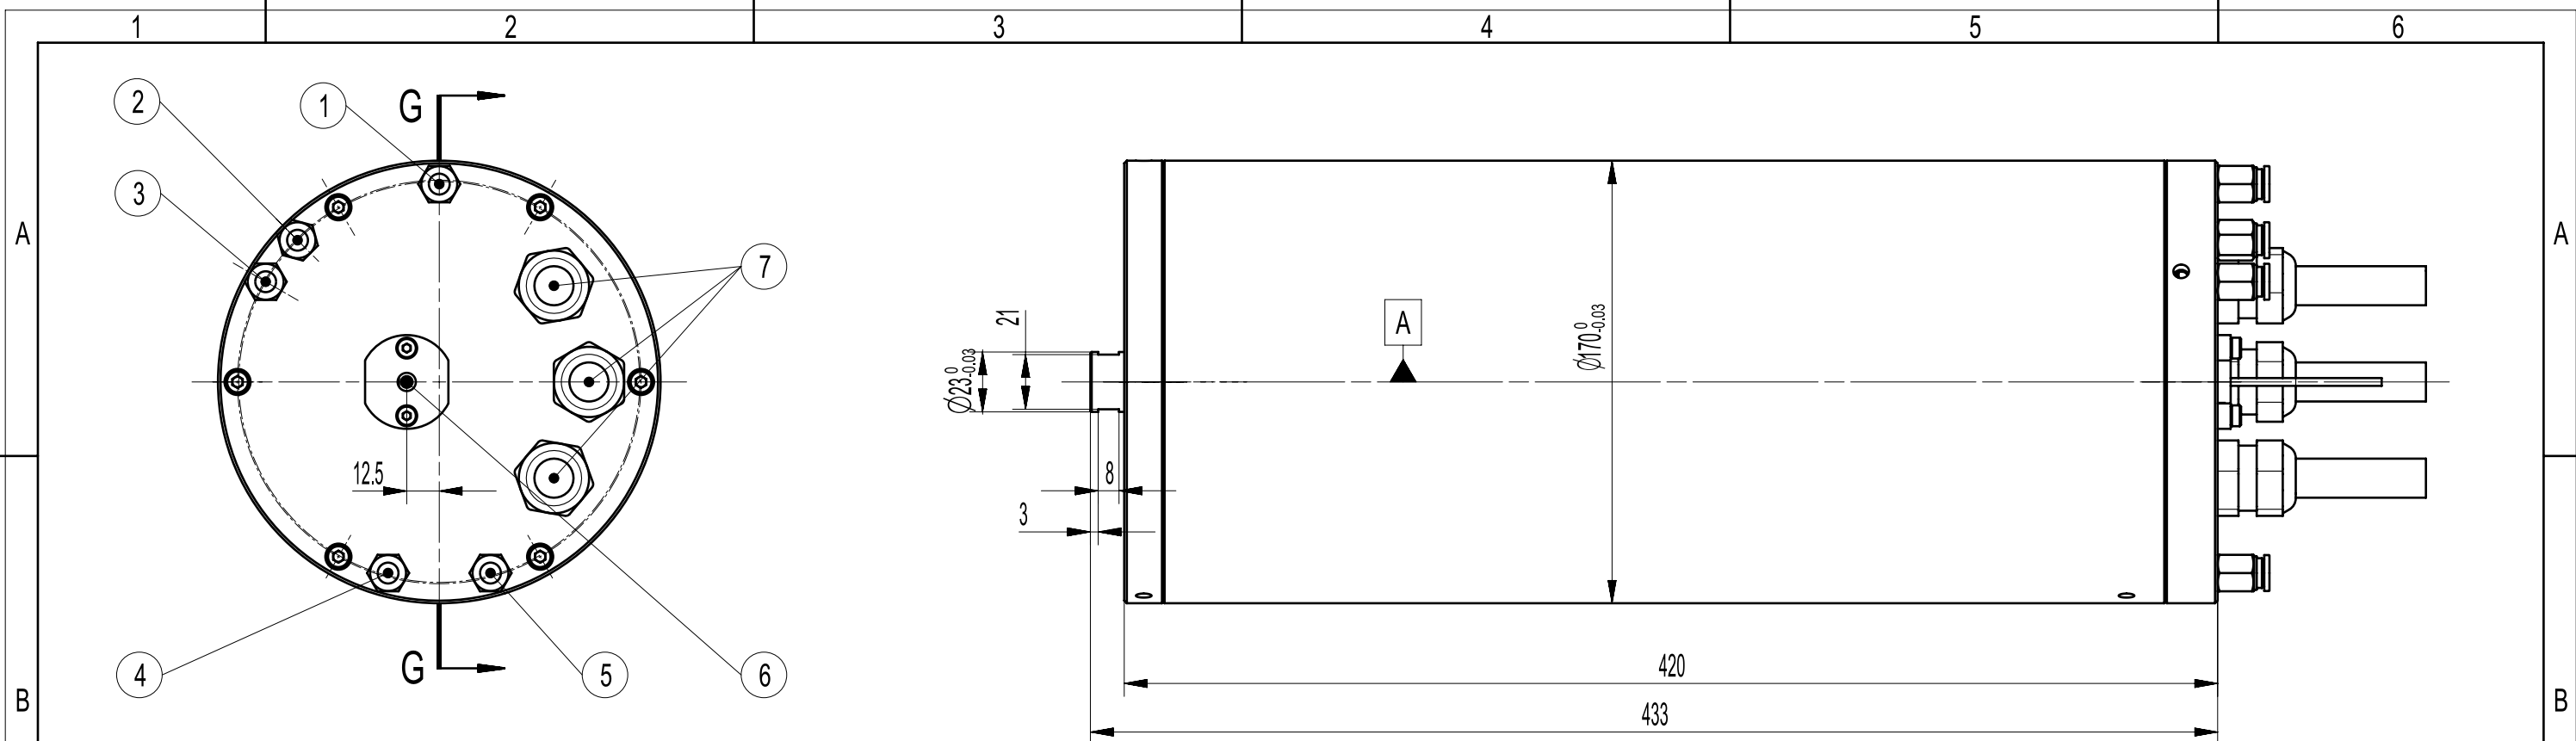


SECTION G-G

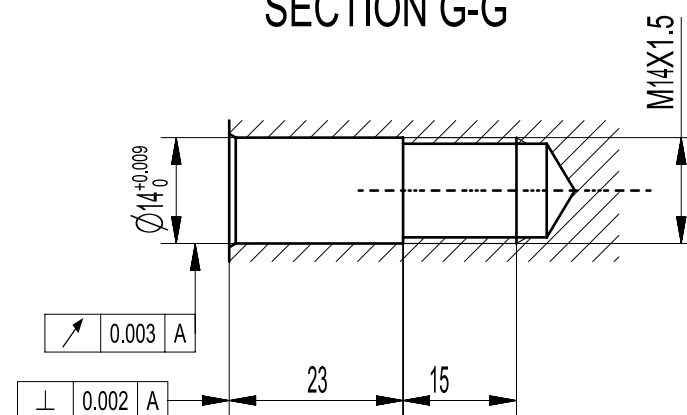

Lable description			
NO.	Function	Interface	Description
1	Water outlet	G1/4	With piping fitting,hose 8X6
2	oil air inlet	G1/8	With piping fitting,hose 6X4,1-1.5bar
3	oil air inlet	G1/8	With piping fitting,hose 6X4,1-1.5bar
4	exhaust outlet	G1/4	With piping fitting,hose 8X6
5	Water inlet	G1/4	With piping fitting,hose 8X6
6	Speed sensor		PNP Type Proximity sensor,1.5m cable,3core
7	Power cable	M25X1.5	1m cable

Motor Specification				
Speed	50000			r/min
Power	80			kW
Voltage	384			V
Current	170			A
Frequency	833.3			Hz
Torque	15.3			Nm
Voltage Const	5.8			V/1krpm
Motor Type	Synchronous			
Lubrication	Oil air			
Lubricant		ISO VG22		
Air quality		Filtration and drying, particle size 5 microns, residual oil content 0.5mg/m ³		
Motor Coolant		Water, flow rate 10L/min@25°C		

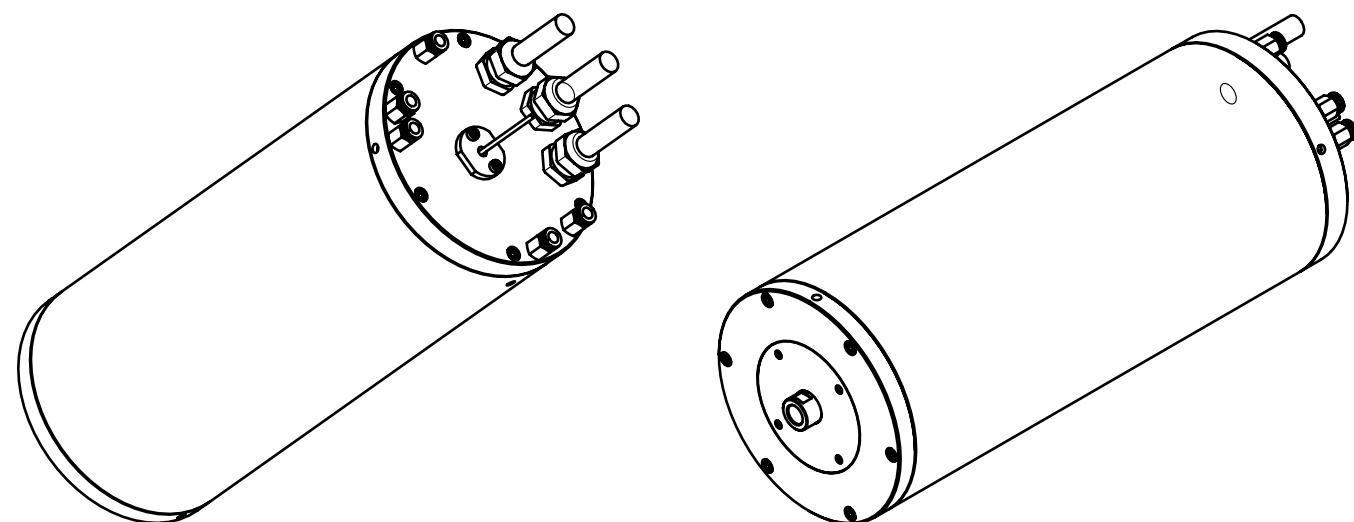

未注尺寸公差			00	主轴外形图		1			
注：孔取(+)，轴取(-)			件 号	名 称		数量	材 料	硬 度	备 注
尺寸/mm						SUF		170TD50Y80	
大于	至	公差							
-	6	±0.05							
6	30	±0.10							
30	120	±0.15				设计		比例	重量(kg)
120	250	±0.25				校对		1:2.5	46
250	500	±0.35				标准化审核			
500	1000	±0.45				工艺会签			
1000	1600	±0.55				审 核			
1600	2000	±0.65	更改号	签字	日期	批 准			